

RL1380

Stainless Steel, Environmentally Sealed, NTEP Certified 1:3,000 Class III Single Cell, IP67




Dimensions

Picture is a representation of actual product

Rated Capacity	W	L	L1	L2	L3	T	H
kg/mm							
7-15	19.1	139.7	19.1	6.4	88.9	1/4-20 UNC	30.2
30-60	23.9	139.7	19.1	6.4	88.9	1/4-20 UNC	30.2
lb/in							
15.4-33.1	0.75	5.50	0.75	0.25	3.50	1/4-20 UNC	1.19
66.1-132.3	0.94	5.50	0.75	0.25	3.50	1/4-20 UNC	1.19

Order Information

Load Rating	Part #	Est. Weight	Price
7 kg	30783	2 lb	Consult
10 kg	30782	2 lb	Consult
15 kg	30781	2 lb	Consult
30 kg	30780	2 lb	Consult
60 kg	30779	2 lb	Consult

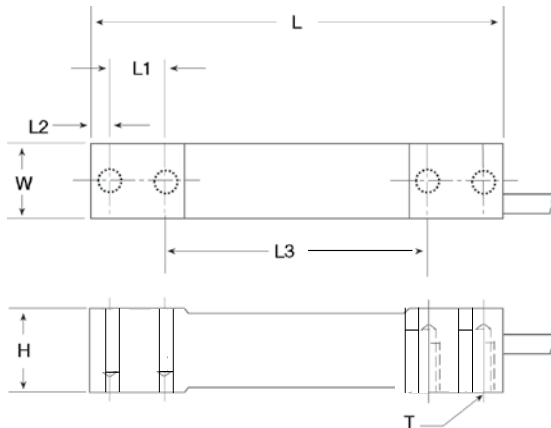

Interchangeable Products

HBM®
PWS..... page 267

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
350 ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated range
14°F to 104°F/-10°C to 40°C
Operating range
-40° F to 150° F/-40° C to 65° C
- Safe Overload:**
150% full scale
- Rated Excitation:**
5-10VDC (15V maximum)
- Combined Error:**
0.03% full scale
- Insulation Resistance:**
1,000 megohms
- Seal Type:**
Environmentally sealed, IP67
- Cable Length:**
3.1 m (10 ft)
- Cable Diameter:**
0.190 polyurethane jacket
- Cable Color Code:**
Green + Excitation
Black - Excitation
White + Signal
Red - Signal
Yellow Shield
- Deflection:**
<0.4 mm Full scale
- Max Platform Size:**
15.75 in x 15.75 in
- Warranty:**
Two-year limited warranty
- Approvals:**

