
## Loadrunner<sup>™</sup> Onboard Weighing Systems Dump Truck Systems Kit










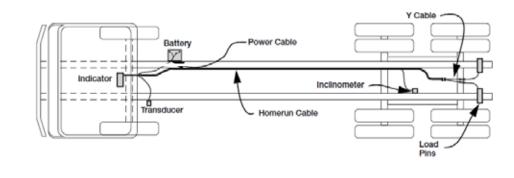

OB-350 Indicator





PN 131211

Power Cable

PN 131221

Dump Truck Load Pin PN 181895







Homerun Cable PN 131228

Compatibility note: The Loadrunner dump truck kit has been designed for use on dual pin hinge pivot type dump bodies only. For dump truck body rear pivot assemblies using a single hinge bar, contact Rice Lake.

## Part Number/Price

| Part #   | Description   | Price   |
|----------|---|---------|
| System   |   |         |
| 158195   | Dump truck system with 2 in load pins, indicator, cables and hardware                               | Consult |
| Replacer | nent Spare Parts  |         |
| 154189   | Onboard weighing dump truck hardware kit for right rear (load pin not included)                     | Consult |
| 159840   | Onboard weighing dump truck hardware kit for left rear (load pin not included)                      | Consult |
| 181895   | Dump truck load pin, 20,000 lb at 1.3mV/V 350 ohm with male M12 Lumberg connector, 2.0in x 11.8in l | Consult |
| 131211   | Hydraulic transducer, RL300-h, 5,000 psi, 32 ft stainless steel IP68 with male M12 connector        | Consult |
| 131219   | OB-350 two-channel indicator, RS232 CANbus interface (does not include power cable)                 | Consult |
| 131221   | Assembly fuse cable, in-line power cable with fuse for OB350 indicator                              | Consult |
| 131222   | Onboard inclinometer, 35ft CANbus cable inclinometer junction box for OB350 indicator               | Consult |
| 131226   | Y-splitter cable, M12 four-way connectors, for use on two-way junction box                          | Consult |
| 131228   | Assembly 15ft cable, homerun cable with M12 five way CANbus F/M connectors                          | Consult |
| 131800   | Assembly 6ft cable, homerun cable with M12 male/female connectors                                   | Consult |
| 158196   | Onboard hydraulic bracket, angle bracket kit used for inclinometer                                  | Consult |
| 116559   | Screw cap hex head, 1/2-20NFx3-1/2, grade 8 steel yellow zinc plated                                | Consult |
| 119963   | Ring, 0.25 x 2.25 x 3 in  | Consult |
| 119966   | Support, 1 x 4 x 5.16 in with 2.02 in hole  | Consult |
| 119973   | Load cell mount weldment  | Consult |
| 119974   | Glass tubing, 2.233 0D x 2.015 ID x 6.5 long  | Consult |
| 153116   | Top lock nut, 1/2-20NF grade 9 yellow zinc  | Consult |
| 15173    | Plain washer, 1/2 type B series N steel zinc plate  | Consult |
| 159839   | Support ring weldment, left rear  | Consult |
| 119969   | Support ring weldment, right rear   | Consult |
| 162356   | Installation manual   | N/C     |

820