

Minebea Intec Midrics Series

Complete Scale



Specifications

- Indicators:**
MIS1 - UR 20 mm LCD
MIS2 - UR with application programs
- Power Supply:**
100 - 200 VAC, 50 - 60Hz
- Readability:**
15,000 scale intervals
- Cable Length:**
1.5 to 6 m (varies by capacity)
- Warranty:**
Two-year limited warranty

Standard Features

- There are hundreds of possible applications for an industrial scale. Whatever, wherever and however – the Midrics® can do it all:
- Painted versions have IP65 protection rating for industrial use
- 304 Stainless steel versions have IP67/IP68 protection ratings
- Four adjustable feet, level indicator on LCE and NCE
- Midrics 1 display, for simple weighing tasks
- Accessories: user installed interface kits, printer, external battery pack, software tools, panel mount kit


Part Number/Price

RLWS PN	Minebea PN	Dimensions	# Load Cells	Capacity	Readability	Est. Weight	Price
103668	MW1P1U-6DC-L	12.6 x 9.5 in	1	6 kg	0.5 g	22 lb	Consult
103669	MW1P1U-15DC-L	12.6 x 9.5 in	1	15 kg	1 g	24 lb	Consult
103670	MW1P1U-30ED-L	15.8 x 11.8 in	1	30 kg	2 g	24 lb	Consult
103671	MW1P1U-60ED-L	15.8 x 11.8 in	1	60 kg	5 g	24 lb	Consult
103672	MW1P1U-60FE-L	19.7 x 15 in	1	60 kg	5 g	22 lb	Consult

Options/Accessories

RLWS PN	Minebea PN	Description	Price
171727	YDH12CWSUS	Holder base mount for ED base	Consult
156441	YDH02CWSUS	Column for ED base	Consult
105607	YDH02CISUS	Wall-mount bracket	Consult
Consult	YBP03CIS	Floor-mount option	Consult
Consult	YAS03MI	Panel mount option	Consult

Custom Part No. Configuration

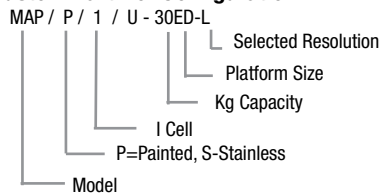

- DC= 12 x 9.5 x 3.4 in
- ED= 15.8 x 11.8 x 3.4 in
- FE = 19.7 x 15.8 x 4.3 in
- GF= 25.6 x 19.7 x 5.6 in
- IG = 31.5 x 23.6 x 5.6 in
- Kits:**
- 4 Load Cell Platforms:
- KK-36 x 36
- NN-48 x 48
- RR-60 x 60
- 4 Load Cell Capacities
- 1500 lb x .1
- 3000 lb x .2
- 6000 lb x .5