

RoughDeck® CS

Coil Floor Scale

FLOOR SCALES



Specifications

Capacities:

Scale Capacity	Load Cell and Mount Capacity
40,000 lb	Qty (4) 50,000 lb each
60,000 lb	Qty (4) 50,000 lb each
80,000 lb	Qty (4) 75,000 lb each

Warranty:

RoughDeck CS weldment five years, load cells two years, all other components one year

Approvals:

NTEP CC 11-068, Class III, 5,000d

Standard Features

- Capacities: 40,000 lb to 80,000 lb, consult factory for custom capacities
- Sizes: 5 ft x 5 ft - 6 ft x 6 ft, consult factory for custom sizes
- Height: 11 in
- Deck thickness: 1/2 in smooth top plate
- JB4SS Tuffseal® signal trim junction box
- MVS self-checking mounting system, top access to load cells
- Black epoxy paint
- 20 ft SURVIVOR® EL147HE hostile environment load cell cable
- Ships unassembled with (8) concrete anchor bolts

APPROVALS




Part Number/Price

Part #	Description	Capacity	Est. Weight	Price
107493	5 ft x 5 ft x 11 in	40,000 lb (20,000 kg)	1,900 lb	Consult
107494	5 ft x 5 ft x 11 in	60,000 lb (30,000 kg)	1,900 lb	Consult
107495	5 ft x 5 ft x 11 in	80,000 lb (40,000 kg)	1,900 lb	Consult
107496	6 ft x 6 ft x 11 in	40,000 lb (20,000 kg)	2,575 lb	Consult
107497	6 ft x 6 ft x 11 in	60,000 lb (30,000 kg)	2,575 lb	Consult
107498	6 ft x 6 ft x 11 in	80,000 lb (40,000 kg)	2,575 lb	Consult

Options/Accessories


Part #	Description	Price
114678	V-Top coil cradle (5 ft x 5 ft scale)	Consult
114684	V-Top coil cradle (6 ft x 6 ft scale)	Consult
Consult	Pit coping	Consult

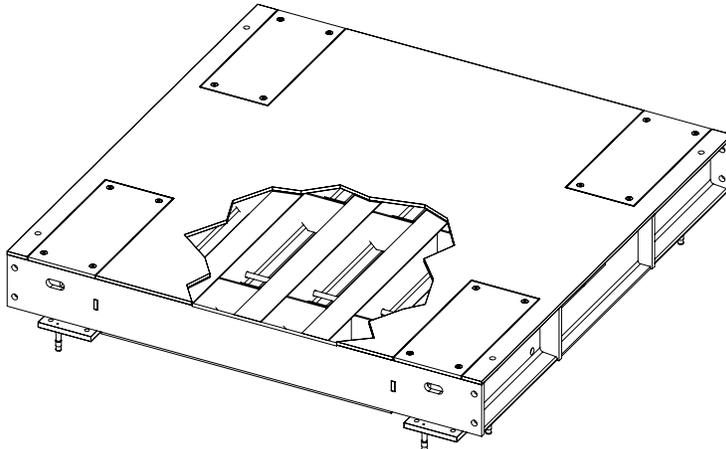

www.ricelake.com | Phone: 800-472-6703

RICE LAKE

Dimensions			
5 ft x 5 ft V-Top Coil Cradle			
A	60 in	D	3.64 in
B	60 in	E	14.95 in
C	12.30 in	F	25°
6 ft x 6 ft V-Top Coil Cradle			
A	72 in	D	3.99 in
B	72 in	E	14.96 in
C	22.62 in	F	24°

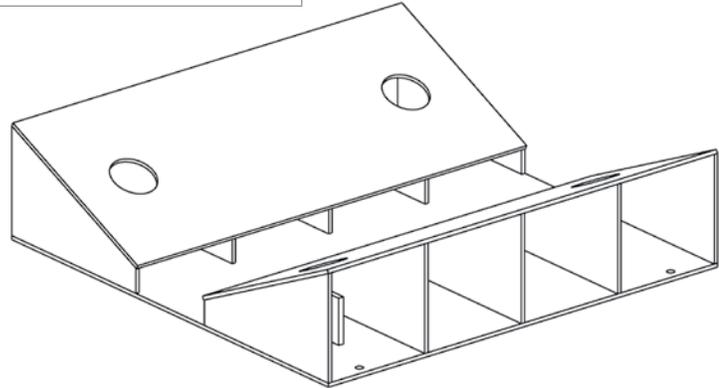

V-Top Coil Cradle

