

1260S

Aluminum, Environmentally Sealed, NTEP Certified 1:10,000 Class III Single Cell, IP66



APPROVALS



Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL 1260 page 190

VPG TEDEA-HUNTLEIGH®

1260 page 359


Dimensions

Picture is a representation of actual product

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
kg/mm													
75-635	52.0	16.0	62.3	52.0	16.0	52.3	63.0	50.0	35.0	107.0	35.0	5.5	188.0
lb/in													
165.4-1,399.9	2.04	0.62	2.45	2.04	0.62	2.05	2.48	1.96	1.37	4.21	1.37	0.21	7.40

Order Information

Load Rating	Part #	Est. Weight	Price
75 kg	76395	5 lb	Consult
100 kg	76396	5 lb	Consult
150 kg	76397	5 lb	Consult
200 kg	76398	5 lb	Consult
250 kg	76399	5 lb	Consult
300 kg	76400	5 lb	Consult
500 kg	76401	5 lb	Consult
635 kg	76402	5 lb	Consult

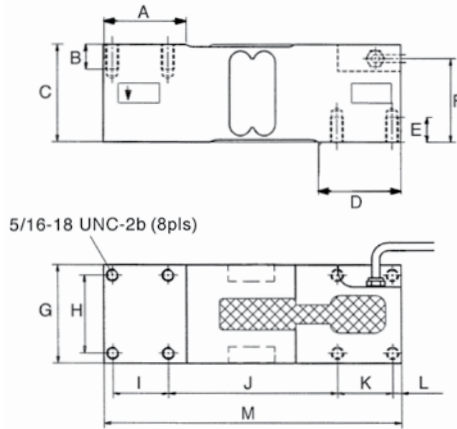

Specifications

Full Scale Output:
2.0 mV/V

Output Resistance:
350 (± 3) ohms

Input Resistance:
415 (± 15) ohms

Material/Finish:
Anodized aluminum

Temperature:
Compensated range
14°F to 104°F (-10°C to 40°C)
Operating range
0° F to 150° F (-18° C to 65° C)

Seal Type:
Environmentally sealed, IP66

Safe Overload:
150% of full scale at center loading point

Rated Excitation:
5- 10 VDC (15 V maximum)

Combined Error:
0.02% full scale

Insulation Resistance:
2,000 megohms

Cable Length:
10 ft (3.1 m)

Cable Diameter:
0.220 polyurethane jacket

Cable Color Code:
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense

Max Platform Size:
24 in x 24 in

Warranty:
One-year limited warranty

Approvals:
cFMus
NTEP