



APPROVALS





Dimensions

Picture is a representation of actual product

Rated Capacity	A	B	C	D	E	H
kg/mm						
5,000	80.0	19.0	70.0	20.0	33.4	30.0
10,000	92.0	28.0	80.0	14.6	33.4	33.0
20,000-30,000	110.0	29.0	101.5	26.3	39.0	50.0

Order Information

Load Rating		Part #	Est. Weight	Price
5,000 kg	11,023.1 lb	65854	3 lb	Consult
10,000 kg	22,046.2 lb	65855	5 lb	Consult
20,000 kg	44,092.5 lb	65856	8 lb	Consult
30,000 kg	66,138.7 lb	65857	8 lb	Consult

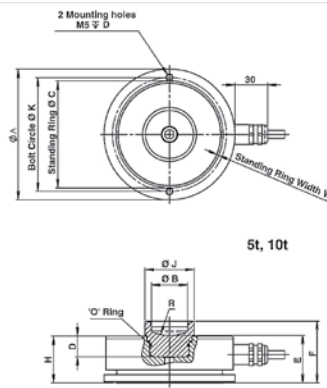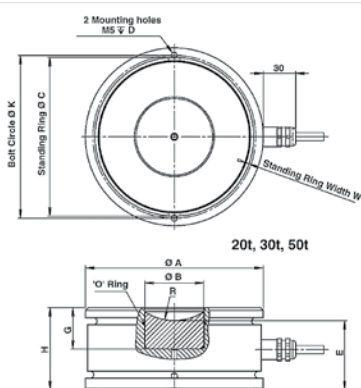

Interchangeable Products

WEIGHTRONIX

220 —

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

220 page 60

Specifications

Full Scale Output:
2 mV/V**Output Resistance:**
1,025 (± 20) ohm**Input Resistance:**
1,065 (± 60) ohm**Material/Finish:**
Stainless steel**Temperature:**
Compensated range
14° to 104°F (-10°C to 40°C)
Operating range
0°F to 150°F (-18°C to 65°C)**Seal Type:**
Hermetically sealed, IP68**Safe Overload:**
150% at center loading point, full scale**Rated Excitation:**
5-10 VDC (15 V maximum)**Combined Error:**
0.020% full scale**Insulation Resistance:**
2,000 megohms**Deflection at Capacity:**
< 0.5 mm at full scale**Cable Length:**
5 m (5000 kg)
10 m (10,000-20,000 kg)
20 m (30,000 kg)**Cable Diameter:**
0.220 polyurethane jacket**Cable Color Code:**
Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Gray -Sense**Warranty:**
One-year limited warranty**Approvals:**
cFMus
NTEP
OIML (Available upon request)