



**DISCONTINUED
LIMITED STOCK
AVAILABLE**

APPROVALS




Dimensions

Picture is a representation of actual product

Rated Capacity	H	H1	L	L1	T	W	W1
kg/mm							
750-2,000	125.00	95.00	176.00	134.5	M16 x 2-6H	76.00	46.00
lb/in							
1,653.5-4,409.2	4.92	3.74	6.93	5.30	M16 x 2-6H	2.99	1.81

Order Information

Load Rating		Part#	Est. Weight	Price
750 kg	1,653.5 lb	42117	8 lb	Consult

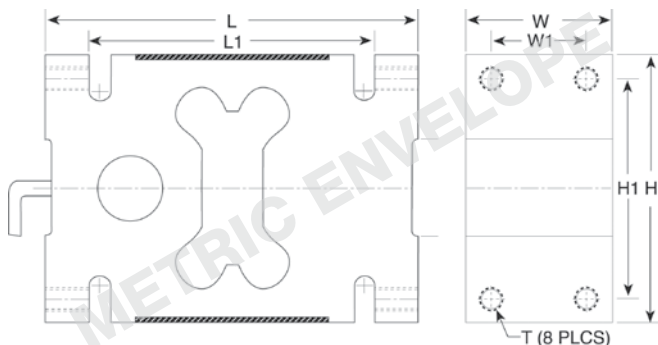

Interchangeable Products

VPG TEDEA-HUNTLEIGH®

1320 page 363

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

410 (± 10) ohm

Material/Finish:

Anodized aluminum

Temperature:

Operating range
0°F to 150°F (-18°C to 65°C)

Seal Type:

Environmentally sealed, IP65

Safe Overload:

150% full scale

Rated Excitation:

5- 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohms

Cable Length:

6 m (20 ft)

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Max Platform Size:

4 ft x 4 ft (1.22 m x 1.22 m)

Warranty:

One-year limited warranty

Approvals:

cFMus