

PC7

Stainless Steel, Hermetically Sealed, OIML C3, IP69K



APPROVALS




Dimensions

Picture is a representation of actual product

Rated Capacity	H	H1	L	L1	L2	L3	L4	W	W1	T
kg/in										
100-500	2.88	1.00	5.91	3.41	2.92	1.50	0.63	1.50	1.00	M8
lb/mm										
220.5-1,102.5	73.00	25.4	150.00	86.5	74.00	38.00	16.00	38.1	25.4	M8

Order Information

Load Rating	Part#	Est. Weight	Price
100 kg	161719	6 lb	Consult
250 kg	161720	6 lb	Consult
500 kg	161721	6 lb	Consult

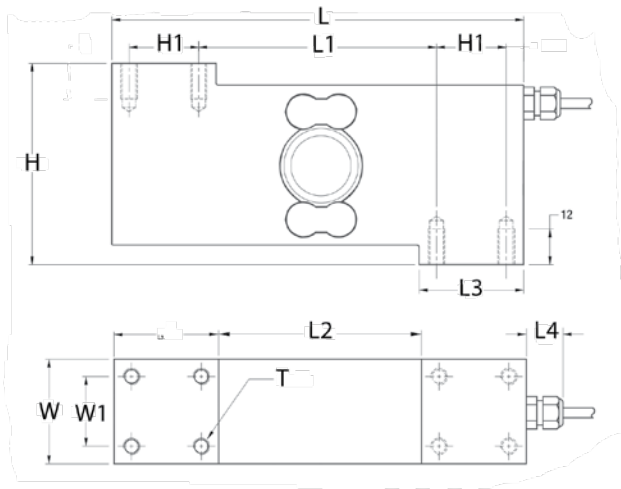

Interchangeable Products

VPG TEDEA-HUNTLEIGH®

1510 page 364

Specifications

Full Scale Output:

2mV/V ±5%

Output Resistance:

350 (± 10) ohms

Input Resistance:

380 (± 20) ohms

Material/Finish:

Stainless steel construction with electro-polished finish

Temperature:

Operating range
0°F to 150°F (-18°C to 65°C)

Seal Type:

Hermetically sealed, IP69K

Safe Overload:

150%

Rated Excitation:

5-15 VDC

Insulation Resistance:

5,000 megohms

Max Platform Size:

Up to 600 mm x 600 mm

Cable Length:

3 m (9.9 ft)

Cable Color Code:

Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield
Blue +Sense
Brown -Sense

Warranty:

One-year limited warranty

Approvals:

OIML

