

PW15

Stainless Steel, Environmentally Sealed, NTEP Certified 1:5,000 Class III Single Cell, IP67

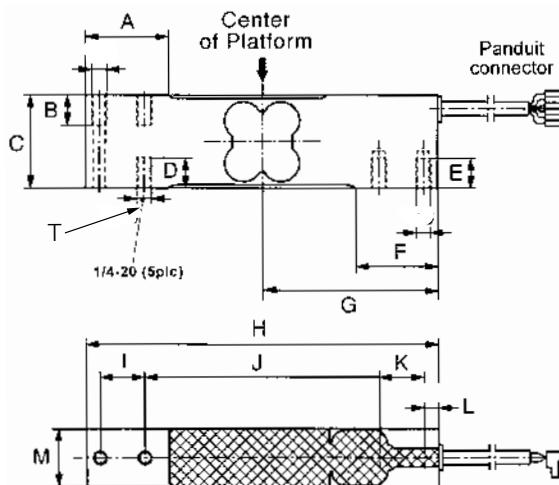
HBM

**APPROVALS****Dimensions***Picture is a representation of actual product*

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
kg/mm													
10-150	35.00	13.00	40.00	13.00	13.00	35.00	75.00	150.00	19.00	100.00	19.00	6.2	25.00
lb/in													
22.1-330.7	1.37	0.51	1.57	0.51	0.51	1.37	2.95	5.90	0.74	3.93	0.74	0.24	0.98

Order Information

Load Rating		Part#	Est. Weight	Price
10 kg	22.1 lb	76769	3 lb	Consult
15 kg	33.1 lb	76771	3 lb	Consult
20 kg	44.1 lb	76772	3 lb	Consult
50 kg	110.3 lb	76774	3 lb	Consult
75 kg	165.3 lb	76775	3 lb	Consult
100 kg	220.5 lb	76776	3 lb	Consult
150 kg	330.7 lb	84820	3 lb	Consult

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RLPWM15 page 178

VPG TEDEA-HUNTLEIGH®

1142* page 358**Color code is different***Specifications****Full Scale Output:**

2.0 mV/V

Output Resistance:

359 (± 5) ohms

Input Resistance:

380 (± 15) ohms

Material/Finish:

Stainless steel

Temperature:

Compensated range

14°F to 104°F (-10°C to 40°C)

Operating range

0°F to 150°F (-18°C to 65°C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% Full scale

Rated Excitation:

5- 10 VDC (15 V maximum)

Total Error:

0.02% Full scale

Insulation Resistance:

1,000 megohms

Cable Length:

10 ft (3.1 m)

Cable Diameter:

0.190 PVC jacket

Deflection:

0.2 mm (0.007 in)

Cable Color Code:

Blue +Excitation

Black -Excitation

White +Signal

Red -Signal

Green +Sense

Grey -Sense

Warranty:

One-year limited warranty

Approvals:

FM

NTEP