

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RLPWM16* page 184

RICE LAKE WEIGHING SYSTEMS

RL1260* page 190

VPG TEDEA-HUNTLEIGH®

1260* page 359

*Color code is different

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

300-500 ohms

Input Resistance:

300-500 ohms

Material/Finish:

Aluminum

Temperature:

Compensated range

14°F to 104°F (-10°C to 40°C)

Operating range

0°F to 150°F (-18°C to 65°C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5- 10 VDC (15 V maximum)

Total Error:

0.02% full scale

Insulation Resistance:

2,000 megohms

Cable Length:

10 ft (3.1 m)

Cable Diameter:

0.100 PVC jacket

Cable Color Code:

Blue +Excitation

Black -Excitation

White +Signal

Red -Signal

Green +Sense

Grey -Sense

Warranty:

One-year limited warranty

Approvals:

FM

NTEP

OIML (Available upon request)

APPROVALS



Available upon request

**DISCONTINUED
LIMITED STOCK
AVAILABLE**




Picture is a representation of actual product

Dimensions

Rated Capacity	A	B	C	F	G	H	I	J	K	L	M
kg/mm											
50-635	52.00	16.00	62.3	52.3	63.00	50.00	35.00	107.00	35.00	5.5	188.00
lb/in											
110.2-1,401.1	2.04	0.62	2.45	2.05	2.48	1.96	1.37	4.21	1.37	0.21	7.40

Order Information

Load Rating	Part#	Est. Weight	Price
50 kg	N/A	5 lb	N/A
75 kg	N/A	5 lb	N/A
100 kg	N/A	5 lb	N/A
150 kg	N/A	5 lb	N/A
200 kg	N/A	5 lb	N/A
250 kg	N/A	5 lb	N/A
300 kg	N/A	5 lb	N/A
500 kg	N/A	5 lb	N/A
635 kg	N/A	5 lb	N/A

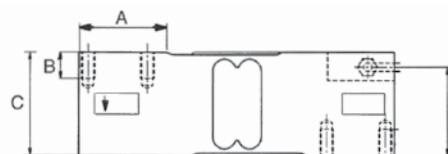

5/16-18 UNC-2b (8pls)

